


# MRF Centrifugal Roof Fan



Proudly distributed in Australia by  
universal fans



## FEATURES





Comply with ErP Directive 2009/125/CE and UE Regulation 1253/2014. Residential Ventilation Unit. To comply with the ErP2018 parameters, a local demand controller must be used.

- High performance centrifugal fans for roof installation.
- Easy and cost-effective solution for a centralized ventilation requirement.
- 3 models Ø100 to 200 mm
- Made in aluminium and steel sheet with epoxy finish, highly resistant to atmospheric agents.
- Ball bearing motor.

## INSTALLATION

Can be mounted directly to standard PVC plumbing pipe and fittings.


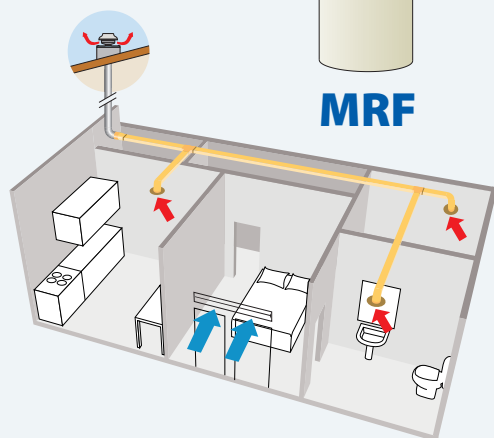
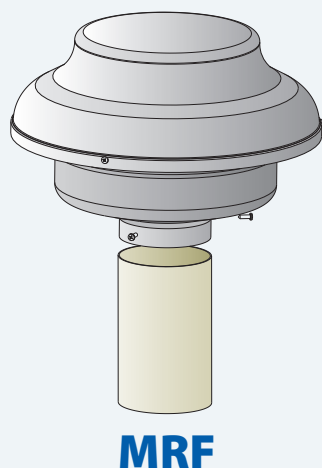


It is recommended that this product be installed by an industry professional (electrician or airconditioning installer).


## PERFORMANCE

MODELS	m³/h	l/s	Pa	W	A	dB(A)*
MRF 100	318	88	415	50	0,22	52
MRF 150	579	161	459	85	0,37	52
MRF 200	794	280	503	110	0,48	55

\*LpA measured at 3m in open field 230V-50Hz.

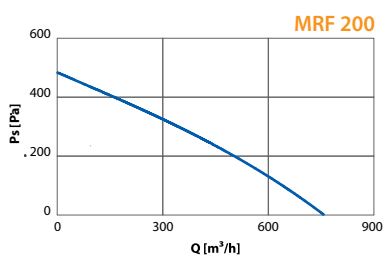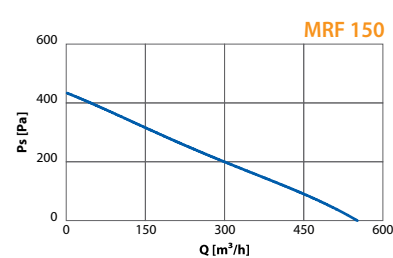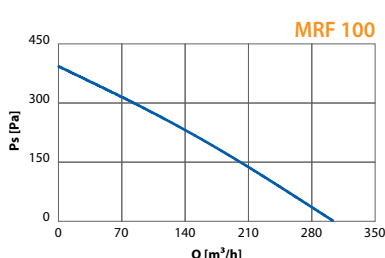

## DIMENSIONS (mm)

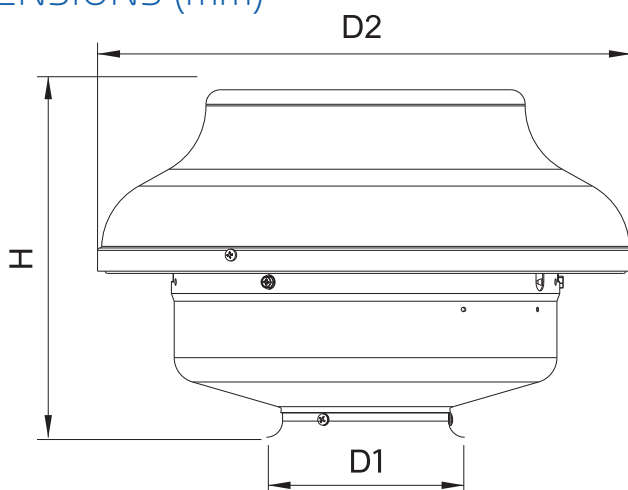

MODELS	D1	D2	H	Kg
MRF 100	98	333	225	3
MRF 150	147	405	266	5
MRF 200	198	405	266	5